

INSTRUMENT CURRENT TRANSFORMER



5.50" Internal Diameter, Multi-Ratio
Width 5.0"




- Application - Relay and Metering
- Frequency 50 - 400hz
- AC capability 600 - 4000 Amperes
- Insulation Class 0.6kV, 10kV BIL full wave
- Other ratios available upon request
- Secondary terminals are brass screws No. 10-32 with one flatwasher & lockwasher.
- Approximate weight 45 lbs
- UL and cUL Certified per ANSI/IEEE C57.13 standard



ELECTRICAL SPECIFICATIONS



CATALOG NUMBER	CURRENT RATIO (A)	RELAY CLASS	ANSI METERING CLASS AT 60HZ					SECONDARY WINDING RESISTANCE(OHMS @75C)	CURRENT RATING FACTOR @30C
			B0.1	B0.2	B0.5	B0.9	B1.8		
ICT89A02	600:5	C200	0.3	0.3	0.3	0.6	0.6	0.31	2.0
ICT89A03	1200:5	C400	0.3	0.3	0.3	0.3	0.3	0.60	2.0
ICT89A06	2000:5	C400	0.3	0.3	0.3	0.3	0.3	1.23	1.5
ICT89A13	3000:5	C400	0.3	0.3	0.3	0.3	0.3	1.43	1.33
ICT89A09	4000:5	C400	0.3	0.3	0.3	0.3	0.3	2.18	1.0

MECHANICAL SPECIFICATIONS


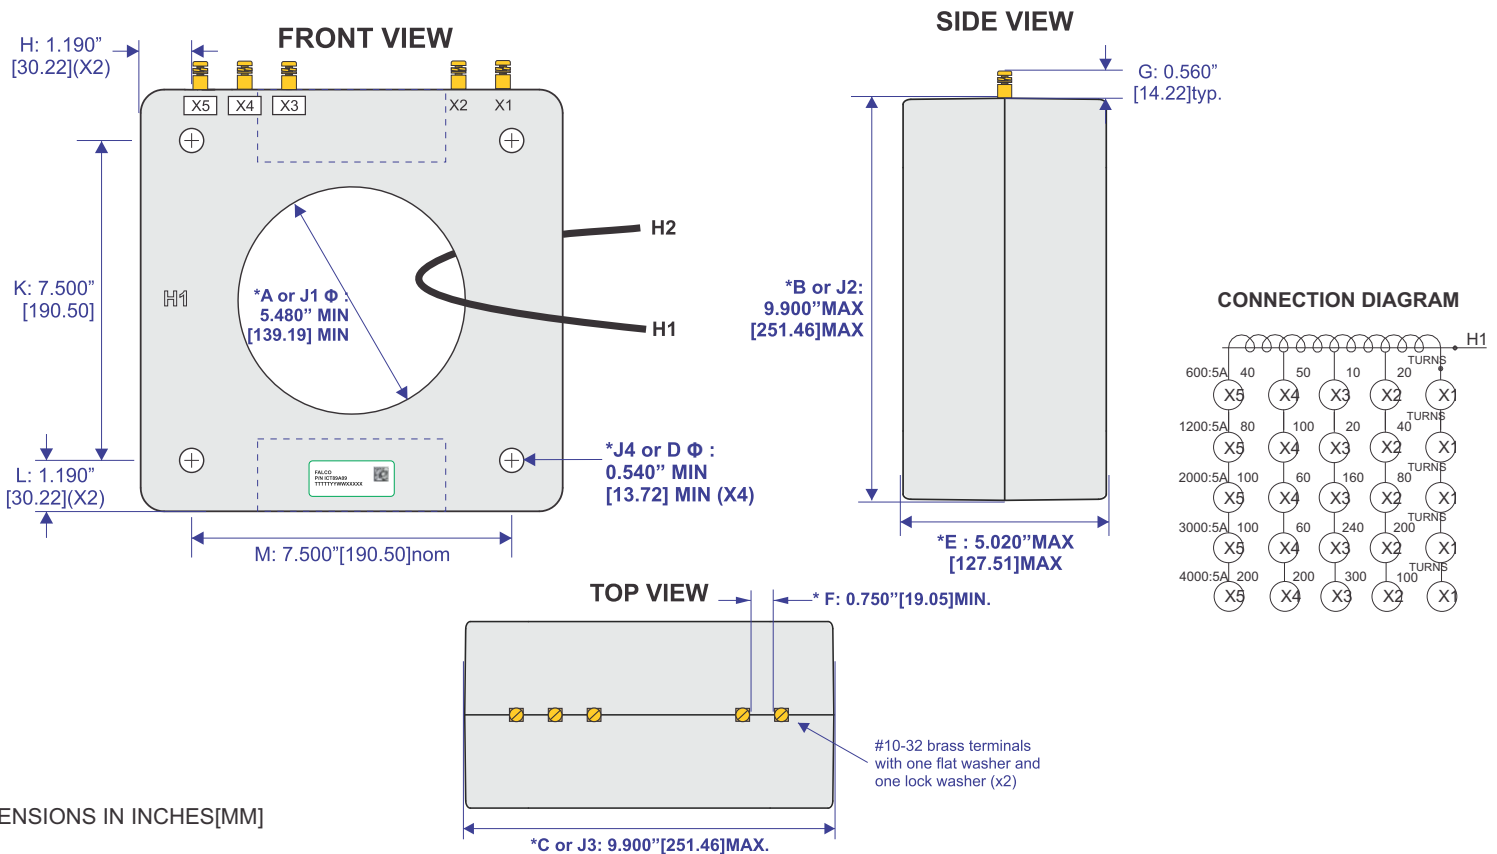


DIMENSIONS IN INCHES[MM]

Typical Excitation Curves

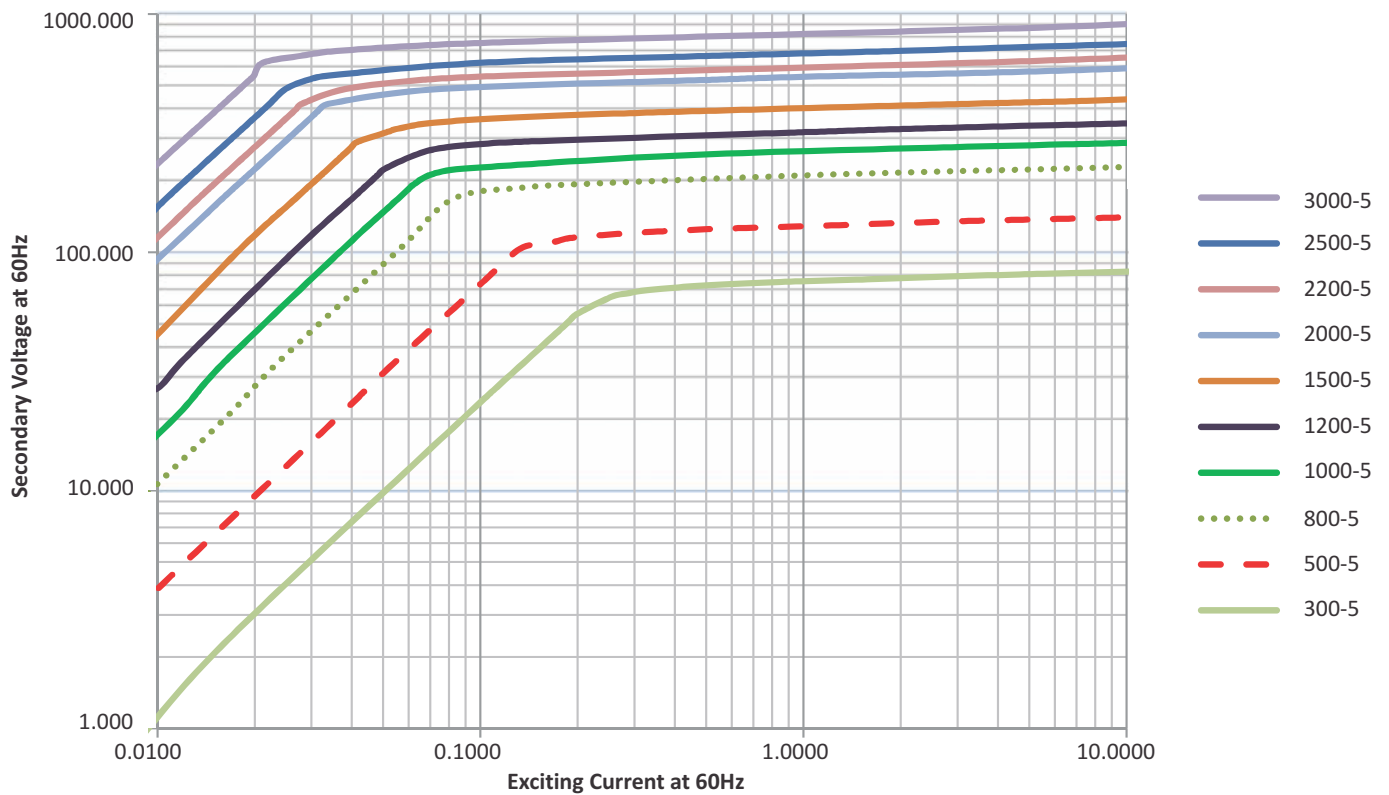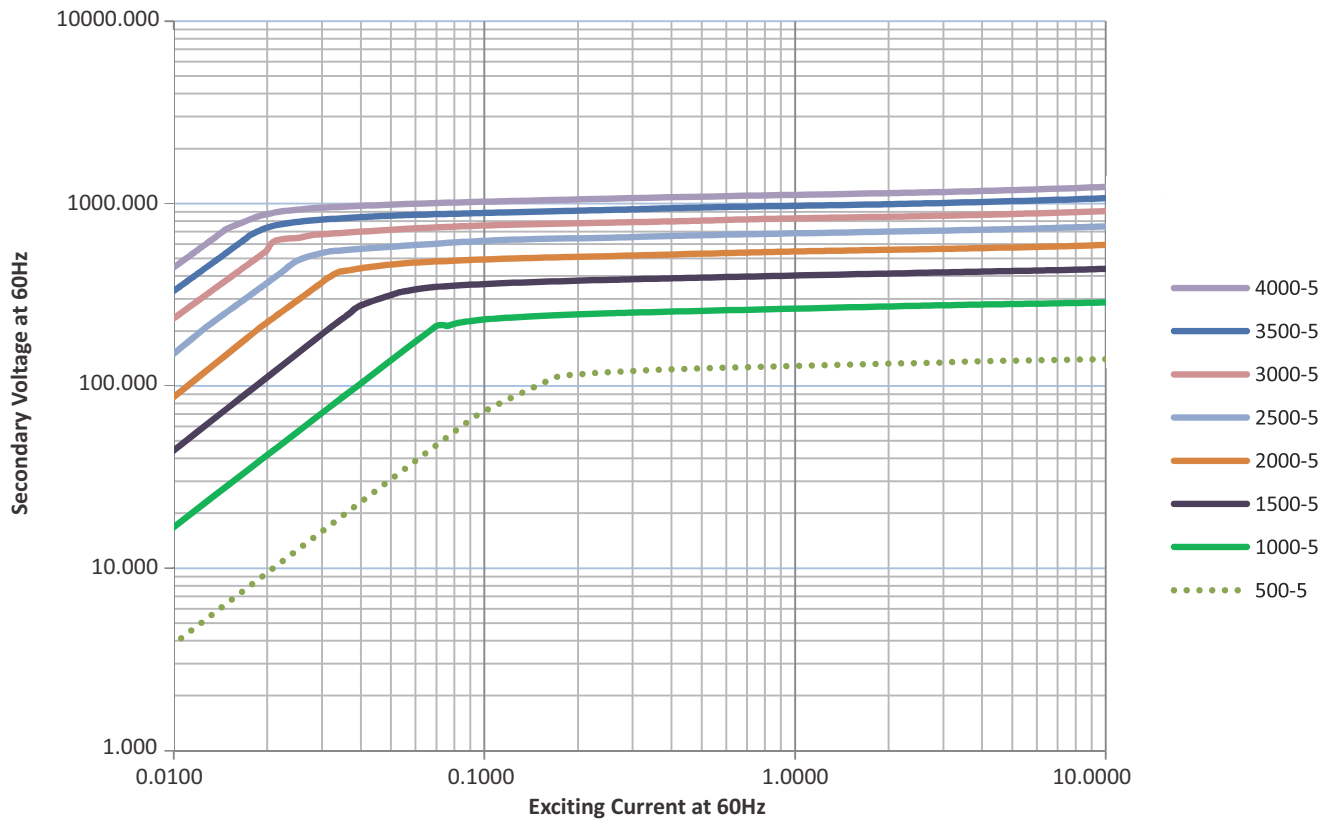

Typical Excitation Curves

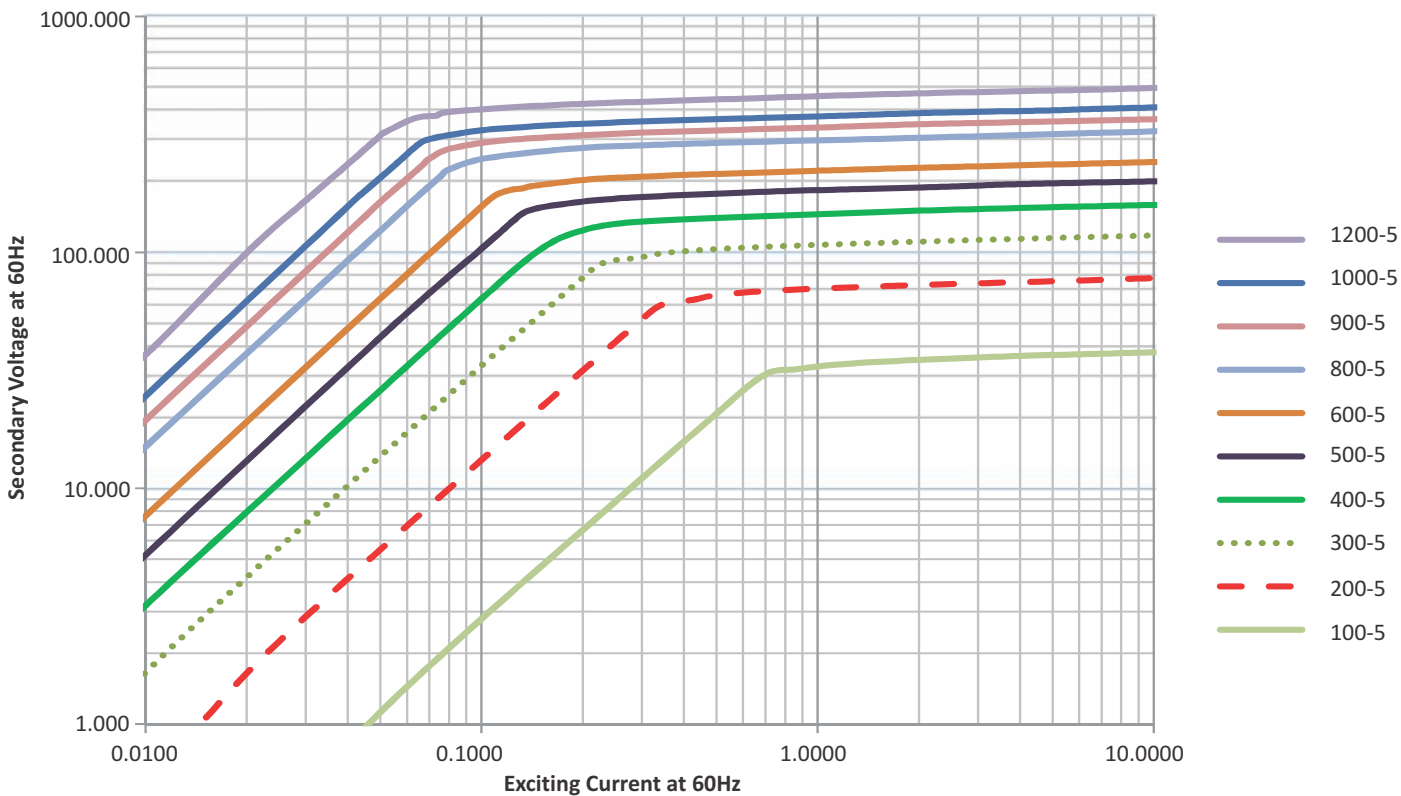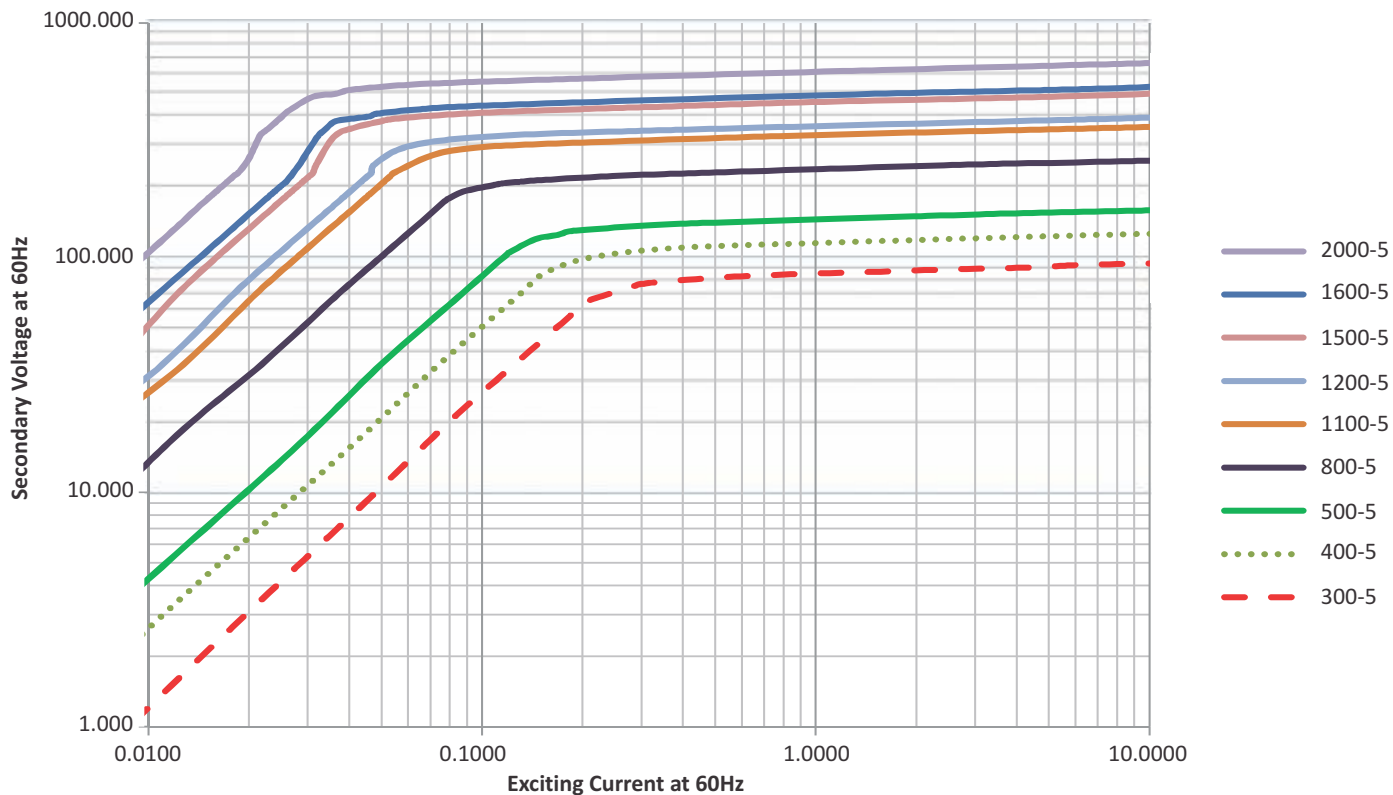

Typical Excitation Curves

